




Ref. No.: 410-03261225

Lackieranlage Zoneneinteilung Stand 10.03.09

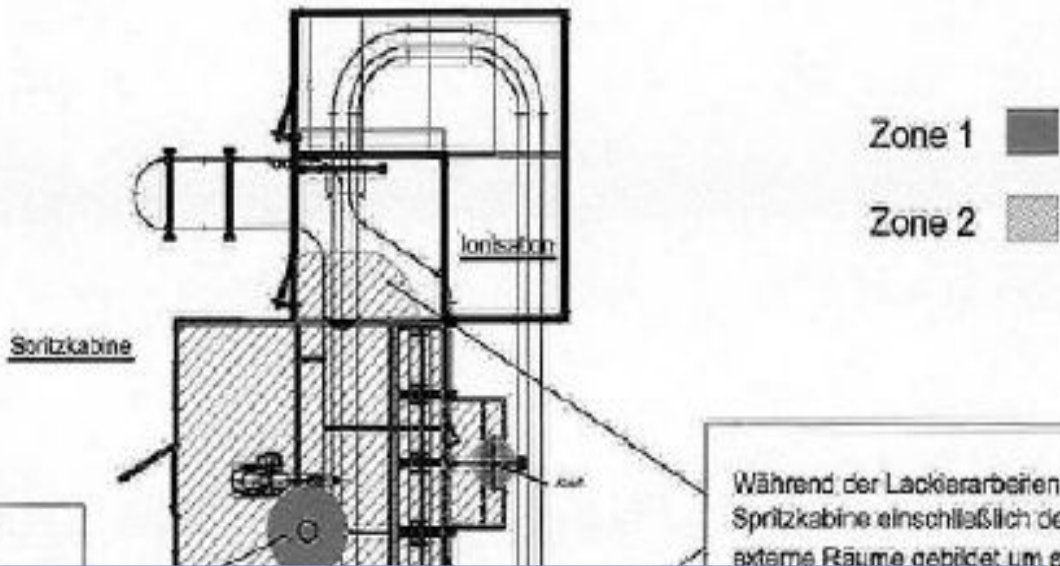

Spülvorgang 10 Minuten max. 3 Liter Flüssigkeit
 Während der Spülung Butylacetat im Umkreis von 1,5 m um die Behälter Zone 2
 Während der Spülung mit Butylacetat im Umkreis von 1,5 m um die Behälter Zone 2

Während der Lackierarbeiten ist das Innere der Spritzkabine einschließlich der Abluftleitungen und externe Räume gebildet um ständige Öffnungen im Zone 2.

Overview and Technical Data:

MONTA - LS072.2K Plastik Painting line

MONTA



Year of Build: Jan 2006

Durch Undichtigkeiten der Versorgungsleitungen können geringe Mengen Lösemittel (Butylacetat) entweichen. Mischraum Zone 2

Lackmischraum

Lackschleim-putztrög

Absperrzone

Spritzkabine



Description:

Used MANTA paint for plastic parts

2k. Dosing type Merge Perfect designed for water-based paint 3 colors and 2 hardener with 2 Lackierrobotersystemen

Operation in 2 zones.

Function ionizing station

In Inosierstation is the removal of dust and the surface by electrostatic discharge and blow the parts.

Discharge is by a high voltage generator and the ionisation (airlock).

The airlock performs 2 functions at the same time. It eliminates the electrostatic charge and removed the dust.

Of tandem electrodes contacting high exit velocity ions are mixed with a pressure jet. This electrically conductive air is - due to the alternating voltage of the mains frequency used - is submitted to positive and negative ions. This means that all electrostatic discharge (positive & negative) eliminated.

Specifications ionizing station

- Outside dimensions: LxWxH approx 2146 mm x 2253 mm x 3000 mm
- Airlock: Number 1 Long 150mm

Function paint booth with wet deposition

The cabin air, and thus the passing of the workpiece to be sprayed paint mist from the cabin is sucked by the fan and passed over the washout.

The washout of the vortex is air scrubber, mist and water mix as a result of high air velocity intense.



Technical data of the paint booth

- Outside dimensions: LxWxH 9,000 mm x 4.454mm x 4.200mm
- Interior dimensions: LxWxH 8.800 mm x 3.494mm x 3.725mm
- Passage section width x height 500mm x 2.100mm
- Air sink rate 0.3m / s
- Exhaust fan
 - Air Power 2x 13,000 m³ / h
 - Power 2x 5.5 kW
- washout
 - pump flow 120 m³ / h
 - Motor power 4.0 kW

Specifications air conditioning

- Air supply for paint spray booths, flash-off zone
 - supply air flow 30,000 m³ / h
 - Power 18.5 kW
- 575 kW heating capacity
- air heating from -12 ° C to + 45 ° C
- type of heating steam
- Humidification
 - Ventation conditions at +20 ° C and 50-60% RH
 - Power humidity pump 5.5 KW
- Device insulation 40mm
- Pre-filter class G3



Technical Data:

Technical Data:

Control: CNC

Buyer Information:

Condition: Very good condition

Available: On Request

Sold as:

EXW (Ex Works - Incoterm)


VAT: 19 %

Buyers Premium: 15 %

Location: Germany



Images:

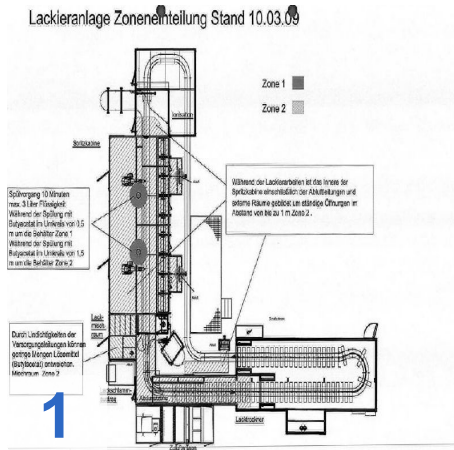



As

e

Assets





As

e

Assets



12



13



Asset-Trade

Assessment & Sale of Used Assets

QR Code for <https://www.asset-trade.de/en/print/pdf/node/1484>

Asset-Trade

**Assessment and Sale of Used Assets world
wide**

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33