



Asset-Trade

Assessment & Sale of Used Assets

Ref. No.: 1425-06201700

Overview and Technical Data:

Used ULMER SF40 REINECKER End profile grinding machine

ULMER

 **ULMER**
WERKZEUGSCHLEIFTECHNIK

Year of Build: Jan 2018



Description:

Used ULMER SF40 REINECKER | CNC End profile grinding machine for sale

Technical Data:

- Travels:
 - X-axis 450 mm
 - Z-axis 250 mm
- Resolution:
 - X, Z-axis: 0.001 mm
 - C-axis: 0.001°
- Rapid traverse X / Z: 15 / 30 m/min.
- Grinding spindle:
 - Motor spindle \varnothing x length: 140 x 300 mm
 - Drive power S6: 14 kW / 170 Hz
 - Infinitely variable speed: 1,000 to 7,500 min⁻¹ / 250 Hz
 - Torque const.: 27 Nm to 5,000 min⁻¹
 - Grinding wheel \varnothing max.: 350 mm
 - Cutting speed: <140 m/s
- Workpiece spindle (C-axis):
 - Mounting taper: SK50
 - Max. speed: 3,000 min⁻¹
 - Torque max.: 28 Nm
- Dimensions WxDxH: 1,900 x 1,900 x 1,900 mm
- Accessories:
 - NUMROTO Plus control and software Cylindrical grinding, loader, in-process measurement
 - Probe for in-process measurement, incl. probing cycles
 - 3D collision monitoring
 - Interpolating C-axis
 - Balancing system for grinding wheel in the machine
 - Automatic chain loader
 - Automatic bar feed
 - Coolant pressure increase
 - Oil pan
 - K&B fire extinguishing system incl. fire damper
 - Connections for central coolant supply and oil mist extraction



- Collet chuck W20 UP
 - Schunk hydraulic chuck
 - General information:
 - The machine is functional, in very good condition and can be inspected by appointment.
-

The ULMER SF 40 REINECKER end facing machine stands for:

- Production of points, chamfers, radii and their combination at the ends of cylindrical tools made of solid carbide, HSS and ceramic.
- Grinding unit with a liquid-cooled motor spindle.
- Variable spindle arrangement of the grinding unit for more flexibility, parallel or perpendicular.
- Up to four different grinding wheels can be mounted on one holder.
- Use of different chuck clamping systems.
- Measuring probe for detecting the axial workpiece position and angular position of the cooling channels.
- Automatic loading devices are available as an option.
- NUM Flexium+ CNC control with powerful NUM DriveX drives and integrated NUM-Safe safety architecture.



Technical Data:

Technical Data:

Control: CNC

Dimensions and Weight:

Height: 1.900 mm

Length: 1.900 mm

Width: 1.900 mm

Weight: 4.000 kg

Buyer Information:

Condition: Very good condition

Available: Immediately

Sold as:

EXW (Ex Works - Incoterm)


VAT: 19 %

Buyers Premium: 18 %

Location: Germany



Images:

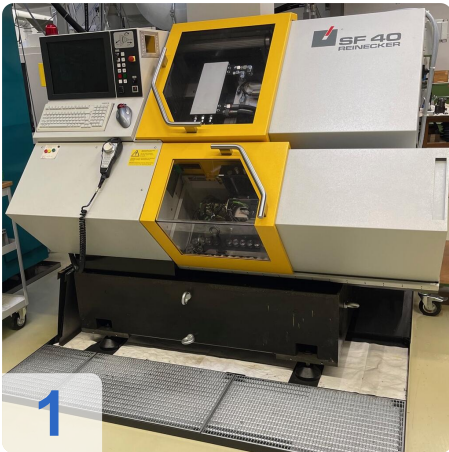




As

e

assets

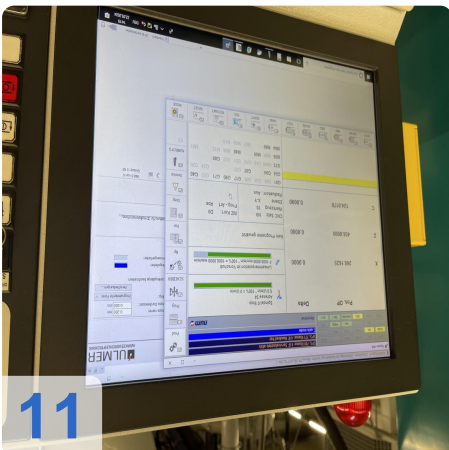





Video:





Asset-Trade

Assessment & Sale of Used Assets

QR Code for <https://www.asset-trade.de/en/print/pdf/node/7794>

Asset-Trade

**Assessment and Sale of Used Assets world
wide**

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33