



Asset-Trade

Assessment & Sale of Used Assets

Ref. No.: 1449-11261419

Overview and Technical Data:

Used TRAUB TNA 500 CNC Lathe for Sale

TRAUB

INDEX

TRAUB

Year of Build: Jan 1996



TNA 500



Description:

Used TRAUB TNA 500 CNC Lathe for Sale

CNC Controls Traub System TX8F

Technical Data;

- Main spindle
 - Turning length: 1000 mm
 - Chuck diameter; 250 / 315 mm
 - Spindle passage (max. bar diameter); 80 mm
 - Connected load: 42 kW
- Main drive
 - Speed range up to; 2800 rpm
 - Max. torque; 545 Nm



Technical Data:

Technical Data:

Control: CNC TX8F
Machine Hours: 85018.00 hrs.
Spindle Hours: 32339.00 hrs.
Turning length: 1000.00 mm
Turning diameter: 315.00 mm
Spindle Speed: 2800.00 rpm
Driven Tools: 12.00
Tool Capacity: 12 x
Tailstock: Yes
Bezel: Yes

Dimensions and Weight:


Height: 2147 mm
Length: 5500 mm
Width: 2287 mm
Weight: 6800 kg

Buyer Information:

Condition: Very good condition
Available: Sold
Sold as:
EXW (Ex Works - Incoterm)
VAT: 19 %
Buyers Premium: 18 %
Location: Germany



Images:

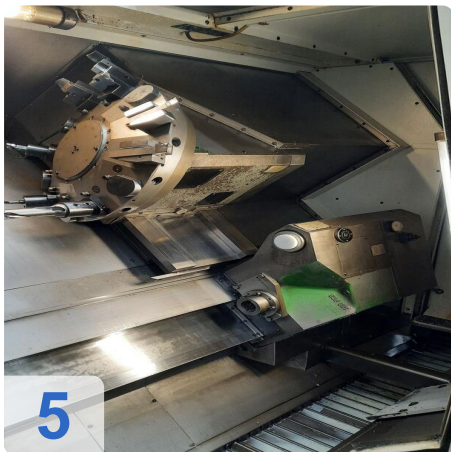



As

e
Assets



6




7



8



9

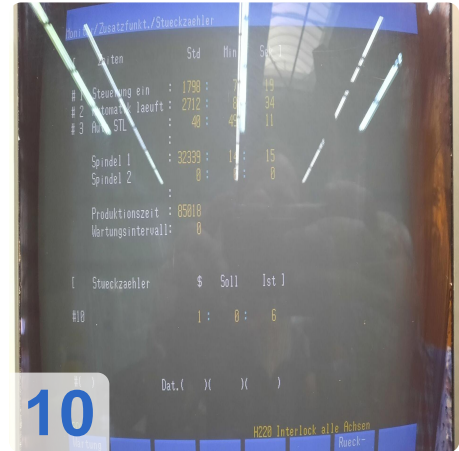

10



11



As

e

Assets



12

Technische Daten

	TNA 500	TNA 600
Arbeitsbereich		
max. Drehlänge	mm 1000	1000
Spindelstichhöhe der Arbeitsspindel	mm 80	100
Durchmesser im vorderen Lager	mm 140	170
Spannfutterdurchmesser Standard	mm 250/315	315/400
Hauptantrieb		
Drehstrommotor, ohne Getriebe stufenlos programmierbar	31	31
Leistung	kW 31	31
Bereich konstanter Leistung	min ⁻¹ 1 - 4,5	1 - 4,5
max. Spindel Drehzahl	Nm 2800	2800
max. Drehmoment	Nm 645	682
max. Drehmoment 25% ED	Nm 769	991
Drehstrommotor, mit Getriebe stufenlos programmierbar	37	37
Leistung bei	kW 37	37
Bereich konstanter Leistung	min ⁻¹ 1 - 16	1 - 16
max. Spindel Drehzahl	Nm 3150	2800
max. Drehmoment	Nm 1790	2520
Vorschubantrieb		
X-Achse Schlitten S1		
Eigang und Bahngeschwindigkeit	mm/min 15000	15000
Vorschubkraft bei 100% ED	N 8000	8000
Vorschubweg	mm 320	320
Kugelführtrieb (Ø x Steigung)	mm Ø32x10	Ø32x10
Z-Achse Schlitten S1		
Eigang und Bahngeschwindigkeit	mm/min 20000	20000
Vorschubkraft bei 100% ED	N 12500	12500
Vorschubweg	mm 1070	1070
Kugelführtrieb (Ø x Steigung)	mm Ø40x10	Ø40x10

13



14



15



Asset-Trade

Assessment & Sale of Used Assets



Asset-Trade

Assessment & Sale of Used Assets

QR Code for <https://www.asset-trade.de/en/print/pdf/node/7766>

Asset-Trade

**Assessment and Sale of Used Assets world
wide**

Am Sonnenhof 16

47800 Krefeld

Germany

Tel.: +49 2151 32500 33